

# AST-230: Application Processor with GPS Baseband



## Features

- 16-Channel high performance GPS-SBAS baseband
  - Indoor positioning
  - Fast time to fix
  - Integrated timing block
- ARM7 based processing engine
  - 90MHz operating frequency
  - JTAG and Trace support
  - ARM and Thumb mode
- Internal memory
  - 2Mbit SRAM
  - 32Kbit battery backed RAM
- Industry standard peripherals
  - USB 2.0 with Full Speed PHY
  - CAN 2.0 controller
  - SPI
  - TWI (I<sup>2</sup>C compatible)
  - Serial Port
  - UART
  - General Purpose I/O
- Low power mode
- Multiple boot mechanisms
- Scalable system clock frequency
- 3.3V I/O, 2.5V Core Supply voltage
- 12mm x 12mm BGA package
- Fully ROHS compliant



Figure: AST-230

## Product Description

AST-230 is a high performance GPS baseband with an ARM7 processing core and integrated peripherals.

The GPS baseband on the AST-230 provides 16 parallel acquisition and tracking channels and facilitates acquisition and tracking of very weak GPS signals. A large number of correlators enable very fast time to fix. In addition, a unique timing block for enhanced timing accuracy adds value to the AST-230.

AST-230 has the popular ARM7 core running at 90MHz. It supports both ARM and Thumb modes of operation and has JTAG interface for application development and debugging.

AST-230 is a peripheral-rich System-on-Chip. Several industry standard peripherals enable AST-230 to be used across segments. USB 2.0 full speed PHY with OTG support allow the AST-230 to be used for portable applications. CAN 2.0 controller has been integrated to support automotive applications. Other standard peripherals like UART, SPI, TWI and Serial Port provide varied communication interface options. Internal peripherals such as Timers, RTC, Battery backed counter and Watch dog timer provide several options for event based applications.

AST-230 supports an internal memory of 2Mbits that can be used to run application programs at the core frequency. In addition, 32Kbits of the memory is battery backed to facilitate retention of key configuration parameters.

AST-230 can be booted in multiple modes offering flexibility for system design. Application program can be stored either in parallel or serial flash or can be loaded from a SPI master.


The operating frequency of AST-230 can be programmed to operate at different frequencies upto a maximum of 90MHz. The flexible scaling offers an option to the application program to trade the operating speed and power consumption.

For power sensitive applications, AST-230 has a low power mode that can reduce the overall power dissipation of the system.



## AST-230 Hardware Details

A typical block diagram of the AST-230 is shown below.

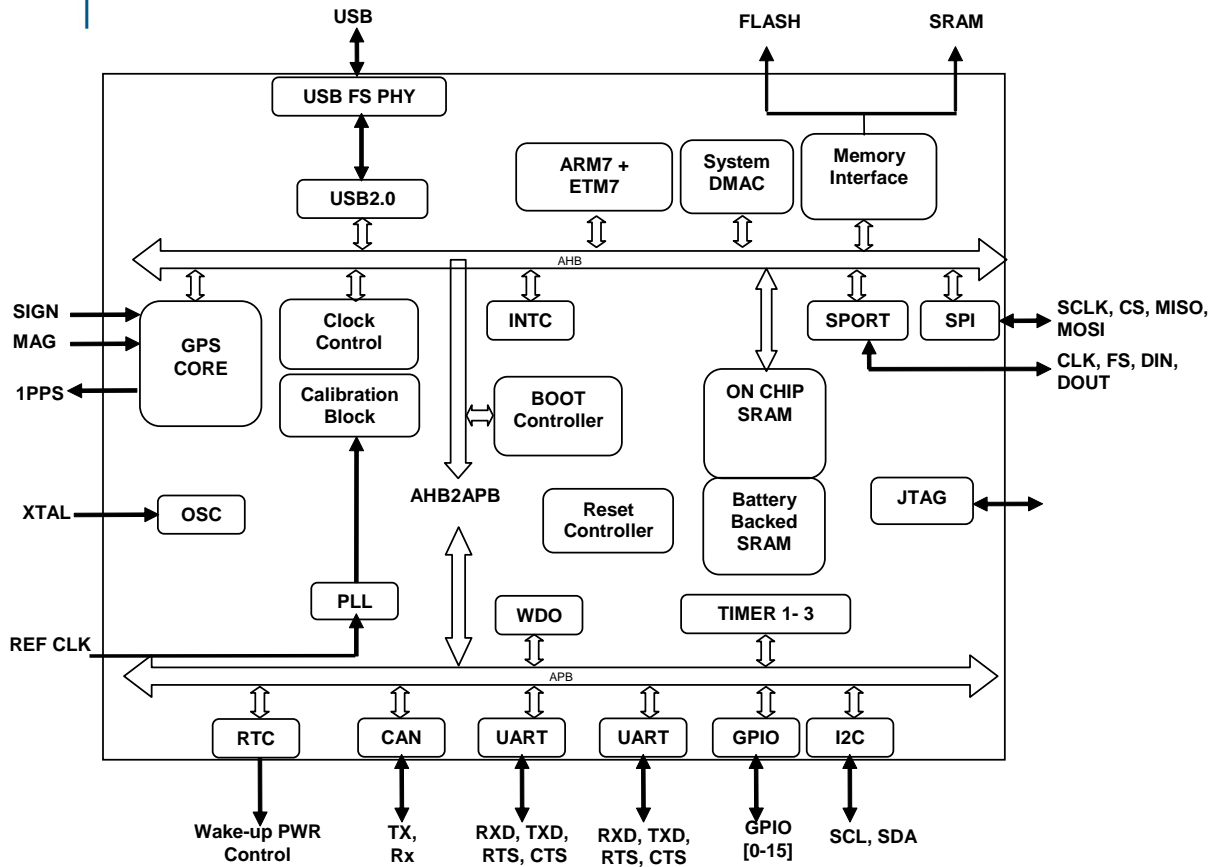

The different blocks of the AST-230 are interconnected through AMBA standard AHB or APB buses. The AHB bus can operate at a maximum of (core / 2) Hz while the APB works at a maximum of (AHB / 2) Hz.

ARM7 core of the AST-230 is associated with an Interrupt controller and a DMA controller. Further, the Memory controller allows the AST-230 to be interfaced with synchronous or asynchronous memories. The external bus interface can address upto 32Mbits of memory space.

AST-230 has multiple power domains. It operates on a core voltage of 1.2V and can work from either 2.5V or 3.3V I/O voltage. In addition, the battery domain requires 1.2V.

The AST-230 is packaged in a 12mm x 12mm FBGA package with 196 functional and power supply pins. It supports industrial temperature range of -40 °C to +85 °C.



# Specifications

## GPS Baseband

Acquisition Channels	16
Tracking Channels	16
Acquisition Sensitivity	-160 dBm
Tracking Sensitivity	-163 dBm
GPS power consumption	50 mW (Tracking)
RF Interface	2-bit; SIGN, MAG
GPS Sampling Clock	16.368MHz

## PROCESSING CORE – ARM7

Operating frequency	90 MHz
Bus architecture	AMBA Standard – AHB and APB
AHB frequency	45 MHz (max)
APB frequency	22.5 MHz (max)
Instruction set	ARM and Thumb modes

## USB

PHY	Full speed
Characteristics	Device, Host and OTG functions
Communication Interface	VCC, GND, D+, D-
OTG interface	Charge pump pins, Chip ID

## CAN

Specification	CAN 2.0
Mailboxes	16 for objects of 8-bytes data length 4 Transmit-only, 4 Receive-only, 8 Transmit-Receive
Remote frames	Extended data and remote frame support
Communication Interface	CAN Tx and Rx

## SPI

System Clock	22.5 MHz (max)
Slave select	6
Chip select	1
Modes	Master, Slave, Multi-master, Boot
Interrupt	Supported
DMA	Supported

## TWO WIRE INTERFACE (TWI)

System Clock	400 KHz
Modes	Master, Slave, Multi-master
Function Select	Selection between GLONASS or GPS / QZSS functionality
Interrupt	Supported

## SERIAL PORT (SPORT)

System Clock	22.5 MHz
Clock source	Internally generated or External source
Word length	3 to 32 bits, big or little endian
Framing	Supported
Interrupt	Supported
I2S	Supported
Multi-channel capability	Supported

## UART

Speed of operation	Upto 1 Mbps
Type	Full UART with frame control
Word length	7 to 12 bits
Interrupt	Supported
DMA	Supported



# Specifications

## GPIO

Available ports	16 bi-directional; configurable as either input or output
Interrupt	Supported

## TIMER

Available	3
External clock input	Supported
Interrupt	Supported

## REAL TIME CLOCK (RTC)

Mode	32-bit free running counter
Clock	32.768 KHz crystal
Power down / wake up features	Supported

## WATCH DOG TIMER (WDT)

Mode	32-bit counter; programmable through software
Clock	32.768 KHz crystal
Configuration	Core and Peripheral reset upon expiry of counter
Traceability	Sticky bit to indicate if reset happened due to Watch Dog function

## CLOCKS

System Clock	90 MHz (max)
Peripheral Clock	45 MHz (max)
Battery backed peripherals	32.768 KHz

## RESET

Reset	Active Low Chip Reset, at least 25 ms low pulse Resets the entire chip
GPS_Reset	Active low Reset, at least 3 clocks wide Resets the GPS correlator only

## JTAG

JTAG	TDO, TDI, TCK, TMS and TRST lines
------	-----------------------------------


## POWER SUPPLY

Core Supply	1.2 V
I/O Supply	2.5 V / 3.3 V
Battery Supply	1.2 V

## PACKAGING

Type	FBGA
Balls	196, 0.8 mm pitch

Table 1: Specifications of AST-230



**Accord Software & Systems Pvt. Ltd.**  
 37, K.R. Colony, Domlur Layout,  
 Bangalore - 560 071. INDIA.  
 Tel: +91 - 80 2535 0105  
 Fax: +91 - 80 2535 2723  
 Website: www.accord-soft.com